



Product Brief

GDM7215

Mobile WiMAX IEEE 802.16e Wave 2-compliant monolithic single-chip

FEATURES

- ▶ Integrates up to 160 MHz ARM946E RISC CPU and 96 MHz P2D DSP with 128 KB on-chip SDRAM
- ▶ 1.2V supply voltage
- ▶ Dual band, ultra low power, highly integrated CMOS RF transceiver for 2.5GHz WiMAX/ 2.4GHz 802.11b/g multimode seamless operations
- ▶ Complies with IEEE 802.11b/g with IEEE 802.16e mobile WiMAX and WiMAX Forum® Wave2 certification
- ▶ WiMAX Maximum throughput: >20 Mbps/DL, 6 Mbps/UL
- ▶ Supports CC/CTC and Chase Combining-CTC Hybrid ARQ in both DL/UL
- ▶ Integrates two receivers and a single transmit Path for MISO
- ▶ Supports seamless handover across the cells or sectors
- ▶ Supports NAND, UART, PCM, I2S, SPDIF, JTAG, I2C interfaces

BENEFITS

- ▶ WiFi/WiMAX Dual-mode connectivity
- ▶ Reduces PCB design complexity
- ▶ Ultra low power consumption
- ▶ Small form factor
- ▶ Optimizes mobile WiMAX/WiFi implementation in mobile devices
- ▶ Minimizes external RF front-end components
- ▶ Satisfies high demands of multimedia processing
- ▶ Supports multimode wireless connectivity—seamless broadband and local wireless roaming
- ▶ Full range of advanced interfaces for network, storage, and audio/visual device applications

GDM7215 supports mobile WiMAX (IEEE 802.16e WAVE 2) and WiFi (802.11b/g) and implements mobile WiMAX RF/MAC/PHY and WiFi RF/MAC/PHY on a monolithic die. GDM7215 supports multimode wireless connectivity with its on-chip RF transceivers, allowing seamless broadband and local wireless roaming. Based on GCT's industry-proven CMOS RF technology, the new GDM7215 integrates WiMAX and WiFi radios, a high performance ARM9 RISC processor along with a 32-bit uniscalar DSP, and a full range of advanced interfaces for network, storage, and audio/visual device applications.


GDM7215 supports all the essential features of mobile WiMAX for the 2 GHz band, including implementation of MISO (two receivers and a single transmitter) and Category-4 H-ARQ (Hybrid automatic repeat-request). It also fully supports WiFi (802.11 b/g) functionality including advanced power management and coexistence support. Due to its optimized design and unique architecture, GDM7215 provides a best-in-class solution for power consumption, size, and multi-mode WiFi/WiMAX connectivity. The low power consumption and robust coexistence scheme eases development of highly compact modules needed by portable and mobile applications. GDM7215 also supports 16 bit memory, SDIO and USB2.0 interfaces.

Applications

- ▶ WiMAX/WLAN companion IC for Mobile phones
- ▶ WiMAX/ WLAN wireless VOIP application
- ▶ WiMAX/ WLAN dual mode wireless adaptor for PC, PDA

Block Diagram

GDM7215 (RF/BB SOC)

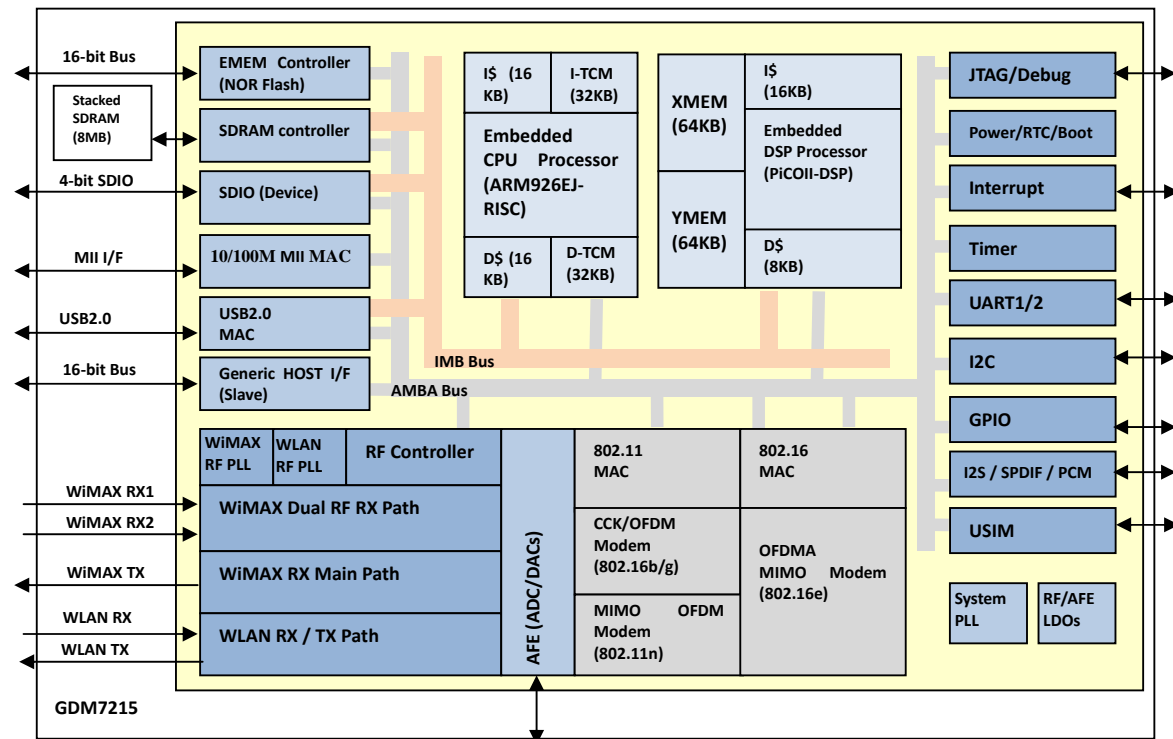

For more information, please contact us at:

Sales: contact_sales@gctsemi.com

Marketing: contact_marketing@gctsemi.com

GCT Semiconductor, Inc.

Headquarters

2121 Ringwood Avenue
San Jose, California 95131, USA
Tel. +1 408 434 6040
Fax. +1 408 434 6050

GCT Asia Pacific, Inc.

10F Specialty Construction Center
395-70 Shindaebang Dong, Dongjak Gu
156-714 Seoul, Korea
Tel. +82 2 2167 1100
Fax. +82 2 2167 1261

